



2022 International Joint Conference on Energy and Environmental Engineering (CoEEE 2022),
Stockholm, Sweden (virtually), June 24–26, 2022

Carbon capture and utilization for industrial applications

Talieh Rajabloo^{a,b,c,*}, Joris Valee^{c,d}, Yves Marenne^e, Leo Coppens^f, Ward De Ceuninck^{a,b,c}

^a Hasselt University, Institute for Materials Research IMO, Wetenschapspark 1, B-3590, Diepenbeek, Belgium

^b IMEC vzw, Division IMOMECA, Wetenschapspark 1, B-3590, Diepenbeek, Belgium

^c EnergyVille, Thor park 8320, 3600, Genk, Belgium

^d Flemish Institute for Technology Research (VITO), Boeretang 200, 2400, Mol, Belgium

^e ICEDD ASBL, Boulevard Frère Orban, 4, 5000 Namur, Belgium

^f Department of Finance, Warocqué School of Business and Economics, University of Mons, Place Warocqué 17, 7000 Mons, Belgium

Received 9 November 2022; accepted 4 December 2022

Available online 15 December 2022

Abstract

Heavy industries such as cement, iron and steel, oil refining, and petrochemicals are responsible for about 22% of global carbon dioxide (CO₂) emissions. There exist several pathways for global CO₂ mitigation. Capturing, storage, and utilization of CO₂ (CCS and CCU) provide an operational solution for significant emission mitigation. High purity CO₂ streams are the most interesting points for CCS and CCU. Pure CO₂ streams are suitable for compression, transport, and storage. Capture technology categories are typically pre-combustion, oxy-fuel combustion, and post-combustion processes. Moreover, the main challenges of the robust industrial CCS/U development are the high costs of CO₂ separation from flue gas or ambient air and the conversion of CO₂ in various utilization pathways. This research study includes a summary of several CCS technologies and CCU pathways, their current status, cost, and industrial deployment.

© 2022 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 2022 International Joint Conference on Energy and Environmental Engineering, CoEEE 2022.

Keywords: Carbon capture technologies and costs; CCS/U; CO₂ stream purity

1. Introduction

Carbon separation, capture, storage, and utilization (CCS/U) aim to reduce global anthropogenic carbon dioxide (CO₂) emissions and tackle climate change [1,2]. Heavy industries, including cement, iron and steel, oil refining, and petrochemicals, are responsible for about 22% of global CO₂ emissions. Among these industries, oil refineries account for 4%–6% [3]. CCS refers to capturing carbon at the emission source and preventing its entry into the atmosphere. In parallel, some studies deal with capturing CO₂ from the ambient air. The captured carbon is then either utilized in industrial processes or sequestered geologically [1,2]. For both utilization and storage, CO₂ capture

* Corresponding author at: Hasselt University, Institute for Materials Research IMO, Wetenschapspark 1, B-3590, Diepenbeek, Belgium.
E-mail address: talieh.rajabloo@uhasselt.be (T. Rajabloo).

<https://doi.org/10.1016/j.egy.2022.12.009>

2352-4847/© 2022 Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 2022 International Joint Conference on Energy and Environmental Engineering, CoEEE 2022.

is an essential process. The main challenges of the prospering industrial CCS/U development are the high costs of CO₂ separation from flue gas or ambient air and the high costs of CO₂ conversion in various utilization pathways [4].

CO₂ capture requires employing several methods like the use of membranes, chemical looping, cryogenic distillation, etc. [1]. The collected CO₂ can be stored in geological sites or utilized directly and indirectly (CCU). The direct utilization example is enhancing oil recovery, and the indirect utilization is using CO₂ as a feedstock for chemical industries to produce valuable products such as the manufacturing fertilizers [5] or synthetic fuels. Possible carbon utilization pathways include the usage of CO₂ in oil and gas recovery enhancement, polymer processing, the manufacturing of fertilizers [5], urea [6], methanol synthetic methane, synthetic crude, electrochemical conversion to certain chemicals, and water desalination projects [1,7].

2. Technology status

Different capture and separation technologies via several methodologies exist, and their costs depend on the CO₂ amount, CO₂ concentration, partial pressure, and the concentrations of contaminations such as N₂ [8,9].

Capture technologies are pre-combustion, oxy-fuel combustion, and post-combustion processes [8,10]. These carbon capture technologies use various materials and separation methods depending on the need and demand [1,8]. Fig. 1 depicts a schematic overview of the different CO₂ capture categories.

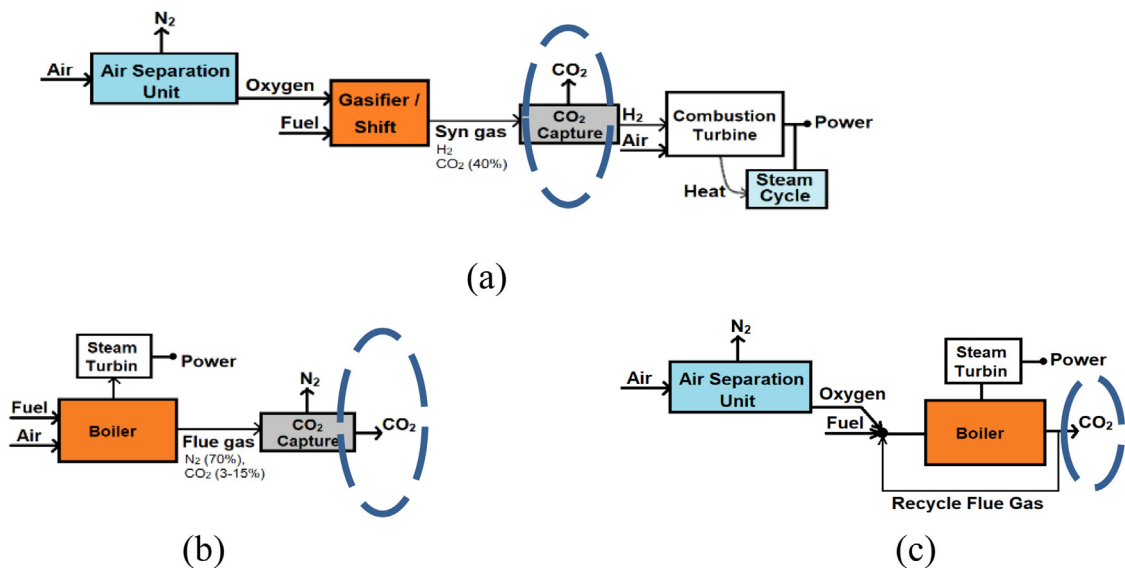


Fig. 1. (a) Pre-combustion, (b) post-combustion, and (c) oxy-combustion carbon capture schematics.

Post-combustion capture refers to capturing CO₂ from the traditional combustion methodologies in which the air supplies oxygen. Therefore, the flue gas contains low concentrated CO₂ diluted in N₂ and NO_x molecules. Hence, the post-combustion CO₂ abatement is a straightforward approach to capturing emitted CO₂ from usual processes and forms the basis of the current infrastructure in CCS [11].

The fundamental implication of pre-combustion capture (PCC) is gasification, where carbonaceous materials such as coal and biomass are reacted at high temperatures to produce synthetic gas [1]. The partial oxidation in pre-combustion leads to the production of CO₂/CO and H₂. Then, H₂ is separated from CO₂ by physical or chemical methodologies to get utilized as fuel with an ultimate combustion product of water [12]. However, the main issue of the pre-combustion route is H₂ combustion. H₂ cannot replace conventional fuels such as methane due to the physics of H₂ combustion. Pre-combustion implies, in many cases, replacing existing kilns or boilers with new kilns and boilers; however, the technology readiness times and its costs are not available yet. Lastly, H₂ combustion with air produces water and NO_x, in which NO_x compounds are environmentally harmful.

Oxy-fuel combustion technology burns fuel in a mixture of oxygen and recycled flue gases (RFG) rather than air. Hence, the end-stage mixture stream consists mainly of CO₂ and condensable water vapor. Separation of the

water vapor is possible during the compression process [1,9]. Oxy-fuel combustion is almost an alternative to the post-combustion CC technique [9]. This process is combusting fuel in a mixture of pure O₂ with purity above 95% and CO₂ with a purity of 80%–98%. So, in oxy-fuel combustion, the air is replaced by pure O₂ to decrease the amount of nitrogen in the exhaust gas. The major challenge is the dissociation of pure O₂ in the air separation unit, which is energy-intensive. The other origin of high purity O₂ production is green H₂ production via water electrolysis. So, the H₂ economy will probably impact the O₂ production costs.

The oxy-fuel combustion process is advantageous because the combustion products are mainly composed of CO₂, H₂O, and SO₂. The next step is the separation of H₂O by condensation. Elimination of SO₂ is possible by electrostatic precipitation and desulphurization. These purifications result in a pure CO₂ stream that is suitable for compression, transport, storage, and utilization [8].

Among CCS technologies, post-combustion is the most mature alternative to capture CO₂ and finds use to retrofit existing technologies [13]. Post- and pre-combustion captures rely on methodologies that can separate CO₂ from the mixed stream via (i) Solvent scrubbing, (ii) Solid adsorbent, (iii) Adsorption, (iv) Membrane, (v) Cryogenic distillation [1].

3. Carbon utilization pathways

CCU is the utilization of CO₂ as a raw material for the production of valuable products [1,4]. For scaling up the carbon capture technologies, CO₂ utilization is a promising pathway and will offset CO₂ capture and conversion costs [4]. CO₂ utilization is possible via direct and indirect trajectories. CO₂ of high purity is suitable for direct utilization in many food and beverage industries [1].

As reported in the literature, the most prevalent product of CO₂ conversion is methanol, followed by CO₂-based chemicals and synthetic fuels [14]. Green methanol production, based on oscillating renewable energy sources, requires a flexible operation mode through integration with other sections such as the electrical grid and electrolysis processes [15]. The electrolyzer utilizes green power, CO₂, and water to produce a synthesis gas consisting of carbon monoxide and hydrogen. The electrolyzer includes a steel cylinder of eight-meter height in an adjoining hall. The cylinder contains bacteria to convert the synthesis gas into chemical molecules such as hexanol and butanol.

The electrochemical enhancement of CO₂ to fuels has a two-fold benefit. First, this process reduces CO₂ to value-added molecules. Second, it stores excess renewable at the peak production period into energy in chemical molecules. The existing designs of CO₂ electrolyzers range from microfluidic flow cells to polymer-membrane-based reactors [16].

In addition, novel technologies are under development for CO₂ utilization. As the fossil-based energy cost continues to climb, the interest in CO₂ utilization will intensify [4]. For example, microalgae production is a main CO₂ sink [1]. The CO₂ bio-fixation maximization requires optimization of microalgae growth rate and biomass productivity [17]. Fuel cell (FC) is the other promising technology for CO₂ fixation. FCs efficiently produce energy via an electrochemical process. As a case in point, an algae-based microbial fuel cell is an electrochemical device for capturing and converting carbon dioxide through the photosynthesis process using algae strains to organic matters and simultaneously power generation [9].

As a hindering aspect, CCS and CCU installation will increase the energy input of the plant per unit of product. This excess energy requirement is called the energy penalty [18,19]. In the case of coal power plants, the reduction in energy penalty of CO₂ capture is around 50%, compared to the installed capacity of renewable power (solar PV and onshore wind power) [20].

4. Investment and production costs

CO₂ is not a free substance. Its capturing, purification, and transportation require costs and financial investments, which depend on the site location. Costs of CCS depend on the capturing method. In general, 70%–80% of the total cost of post-combustion treatment comes from the capturing stage [8]. The cost of CCS depends on the partial pressure of CO₂, storage scale, energy costs, and technology innovation.

CCS costs vary widely depending on a case-by-case basis [21]. CCS costs increase by decreasing the storage size and the CO₂ partial pressure [22]. Moreover, the costs of CCS are higher in the case of additional required treatments such as purifying CO₂ and removing toxic or hazardous chemicals [8]. As a case in point, the potential of CCS in the EO (ethylene oxide) plants in the Dutch industry is abating ~0.1 Mt_{CO2} at an abatement cost of ~25 €₂₀₁₃/t_{CO2} [23].

Direct Air Capture (DAC) is more expensive than capturing CO₂ from point sources, and they require large amounts of energy. The current average of atmospheric CO₂ concentrations is globally around 400 ppm. Air transportation and sorbent regeneration also require energy. The minimum theoretically needed energy is about 3.4 times higher than the point sources with a 10% CO₂ concentration [8]. As various kinds of literature report, the costs for DAC are about 200 to 1000 €₂₀₁₈/tCO₂ [8,24]. Various studies follow different CCS cost calculations. The general term of CO₂ capture cost refers to the sum of operational and capital expenditures for CO₂ capturing divided by the total amount of captured CO₂. The other cost calculation methodology is the CO₂ avoided cost, which obtains the cost of captured CO₂ divided by the amount of saved CO₂ compared to the reference plant. The avoided cost includes CO₂ release during capture and is usually higher than the capture cost. Avoided costs are the target of studies on environmental impact assessments [8]. A summary of the costs related to the CCS is available in Table 1. Capturing costs do not include transport and storage costs in Table 1.

Table 1. Summary of main CCS costs.

Plant	Cost ^a
Ethylene oxide	25 € ₂₀₁₃ /tCO ₂ [23]
Natural gas and bio-ethanol processing	17.7–23.9 € ₂₀₁₇ /tCO ₂ [25] ^b
Cement	92–171.7 € ₂₀₁₇ /tCO ₂ [25] ^b
Iron and steel	62.8–105.3 € ₂₀₁₇ /tCO ₂ [25] ^b
Coal-fired power plants	20–40 € ₂₀₁₈ /tCO ₂ [8] ^b
Direct air capture	200–1000 € ₂₀₁₈ /tCO ₂ [8] ^b
Large CO ₂ exhaust sources	18–90 € ₂₀₁₅ /tCO ₂ [24]
CO ₂ transport and storage	10 € ₂₀₁₇ /tCO ₂ ^c [21]
Offshore transport and storage	14.2–32.7 € ₂₀₁₇ /tCO ₂ [26]
Truck transportation of the CO ₂ ^d	0.22 € ₂₀₁₈ /tCO ₂ per km [8]

^aCapture costs refers to the post combustion.

^bCO₂ avoided cost [26].

^cIncreasing the annual transport flow rate from 0.5 to 5 MtCO₂/y would reduce average transport cost more than three times, from over 20 €₂₀₁₇/tCO₂ to around 6 €₂₀₁₇/tCO₂ [21]. Moreover, the cost of CO₂ storage is a relatively small part of overall project costs [26].

^dTypically, at 17 bar and –30 °C.

5. Potential for CCS deployment

The highest global potential and market size for CO₂ utilization is in the chemical and oil industry, with the Enhanced Oil/Gas Recovery (EOR/EGR), urea production, polymer processing, and fuel/chemical synthesis. The cement sector has a considerable uptake potential, while the potential of the food sector is medium. Carbonation, packaging, and horticulture are some cases of CO₂ utilization in the food sector [25].

Achieving mid-century CO₂ net neutrality in Europe requires large-scale expansion of renewable energy and electrification of end-use sectors. Moreover, hydrogen and synthetic fuels are necessary for emission mitigation in hard-to-abate sectors [27]. Therefore, CCU will probably have an increasing role in producing e-methanol, e-methane, or e-crude.

Most scenarios in IPCC's Special Report on Global Warming of 1.5 °C (SR15) show a significant increase in the use of CCS technologies over this century. CCS technologies are costly, but innovative technologies such as CycloneCC [28] could reduce the costs.

Carbon capture technologies are case-dependent, and each case has its own set of challenges and engineering problems. Every process has specific emission points with different quality and quantities, which are the effective parameters for choosing a capture technology [1].

In pre-combustion methodologies, the possibility of adapting kilns and boilers to burn H₂ is unclear and remains at a very low TRL. In the case of oxy-combustion and chemical looping, O₂ purification is necessary, and most conventional plants require a dual fluidized bed system. Moreover, SO_x and NO_x for CO₂ removal impose considerable costs and decreased carbon capture efficiency [1]. For some other sectors, the carbon captures installation has hindering problems such as the distant and uncertain future. Moreover, there exist several gaps in the CCS demonstration and deployment, such as data and information voids, knowledge shortage, and policy gaps.

6. Conclusion

This study discusses the current CCS/U pathways and their differences. In addition to describing the applicable capturing technologies (e.g. post-combustion) and utilizations (e.g. methanol), this paper also includes some of the recent novel technologies for CCS/U. This study also summarizes the costs related to the CCS/U technologies. All data are coming from recent literature and projects. Hence, the provided data are up to date and include practical information for potential users. Overall, the content of this paper will train the reader with the main concepts regarding CCS/U. Moreover, the provided data are beneficial for the research groups engaged with modeling the CCS/U via different scenarios.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

No data was used for the research described in the article.

Acknowledgment

This study is one of the branches of the EPOC (Energy technology modeling framework for policy support towards a Cost-effective and Sustainable society in 2030 and 2050) project, and the authors acknowledge the funder and support of leaders of the related work packages. The work is supported via the energy transition funds project ‘EPOC 2030–2050’ organized by the FPS economy, S.M.E.s, Self-employed, and Energy.

References

- [1] Shah C, Raut S, Kacha H, Patel H, Shah M. Carbon capture using membrane-based materials and its utilization pathways. *Chem Pap* 2021;44:13–29. <http://dx.doi.org/10.1007/s11696-021-01674-z>, Published online.
- [2] Fasihi M, Efimova O, Breyer C. Techno-economic assessment of CO₂ direct air capture plants. *J Clean Prod* 2019;224:957–80. <http://dx.doi.org/10.1016/j.jclepro.2019.03.086>.
- [3] Güleç Fatih. Will meredith CES. Progress in the CO₂ capture technologies for fluid catalytic cracking (FCC) units - A review. *Front Energy Res* 2020;8. <http://dx.doi.org/10.3389/fenrg.2020.00062>.
- [4] Godin J, Liu W, Ren S, Xu CC. Advances in recovery and utilization of carbon dioxide: A brief review. *J Environ Chem Eng* 2021;9(4):105644. <http://dx.doi.org/10.1016/j.jece.2021.105644>.
- [5] Desport L, Selosse S. An overview of CO₂ capture and utilization in energy models. *Resour Conserv Recycl* 2022;180(2021):106150. <http://dx.doi.org/10.1016/j.resconrec.2021.106150>.
- [6] Huang Y, Yang R, Wang C, et al. Direct electrosynthesis of urea from carbon dioxide and nitric oxide. *ACS Energy Lett* 2022;7(1):284–91. <http://dx.doi.org/10.1021/acsenergylett.1c02471>.
- [7] Kang D, Yoo Y, Park J. Accelerated chemical conversion of metal cations dissolved in seawater-based reject brine solution for desalination and CO₂ utilization. *Desalination* 2020;473(2019):114147. <http://dx.doi.org/10.1016/j.desal.2019.114147>.
- [8] van Dael M. Market study report CCU. Vol December. 2018. <https://www.grensregio.eu/assets/files/site/Market-Study-Report-CCU-december-2018.pdf>.
- [9] Abdelkareem MA, Lootah MA, Sayed ET, et al. Fuel cells for carbon capture applications. *Sci Total Environ* 2021;769:144243. <http://dx.doi.org/10.1016/j.scitotenv.2020.144243>.
- [10] Imteyaz B, Qadir SA, Tahir F. Prospects of CO₂ utilization after carbon capture process. In: 12th international exergy, energy and environment symposium (IEEES-12), Doha, Qatar. 2020.
- [11] Balraj A, Sekaran APC, Ramamurthy N, Babarao R, Nagarajan KK, Mayilvahanan SA. Systematic review on sono-assisted CO₂ stripping, solvent recovery and energy demand aspects in solvent-based post-combustion carbon dioxide capture process. *Chem Eng Process - Process Intensif* 2021;170(August 2021):108723. <http://dx.doi.org/10.1016/j.cep.2021.108723>.
- [12] Olabi AG, Obaideen K, Elsaid K, et al. Assessment of the pre-combustion carbon capture contribution into sustainable development goals SDGs using novel indicators. *Renew Sustain Energy Rev* 2022;153(June 2021):111710. <http://dx.doi.org/10.1016/j.rser.2021.111710>.
- [13] Araújo OQF, de Medeiros JL. How is the transition away from fossil fuels doing, and how will the low-carbon future unfold? *Clean Technol Environ Policy* 2021;23(5):1385–8. <http://dx.doi.org/10.1007/s10098-021-02123-x>.
- [14] Lamberts-Van Assche H, Compennolle T. Economic feasibility studies for carbon capture and utilization technologies: a tutorial review. *Clean Technol Environ Policy* 2021;(0123456789). <http://dx.doi.org/10.1007/s10098-021-02128-6>.
- [15] Cui X, Kær SK, Nielsen MP. Energy analysis and surrogate modeling for the green methanol production under dynamic operating conditions. *Fuel* 2022;307(September 2021). <http://dx.doi.org/10.1016/j.fuel.2021.121924>.

- [16] Luc W, Rosen J, Jiao F. An Ir-based anode for a practical CO₂ electrolyzer. *Catal Today* 2017;288:79–84. <http://dx.doi.org/10.1016/j.cattod.2016.06.011>.
- [17] Senatore V, Buonerba A, Zarra T, et al. Innovative membrane photobioreactor for sustainable CO₂ capture and utilization. *Chemosphere* 2021;273:129682. <http://dx.doi.org/10.1016/j.chemosphere.2021.129682>.
- [18] Vasudevan S, Farooq S, Karimi IA, Saeys M, Quah MCG, Agrawal R. Energy penalty estimates for CO₂ capture: Comparison between fuel types and capture-combustion modes. *Energy* 2016;103:709–14. <http://dx.doi.org/10.1016/j.energy.2016.02.154>.
- [19] Garcia-Freites S, Jones C. A review of the role of fossil fuel- based carbon capture and storage in the enegy system. 2021.
- [20] Li S, Gao L, He S, Yang D, Wang C, Zheng Y. Carbon capture in power sector of China towards carbon neutrality and its comparison to renewable power. *Fundam Res* 2022. <http://dx.doi.org/10.1016/j.fmre.2022.05.027>, Published online.
- [21] Roussanaly S, Berghout N, Fout T, et al. Towards improved cost evaluation of carbon capture and storage from industry. *Int J Greenh Gas Control* 2021;106(2020):103263. <http://dx.doi.org/10.1016/j.ijggc.2021.103263>.
- [22] Global CCS Institute. Technology readiness and costs for CCS. 2021, (March).
- [23] Saygin D, van den Broek M, Ramirez A, Patel MK, Worrell E. Modelling the future CO₂ abatement potentials of energy efficiency and CCS: The case of the Dutch industry. *Int J Greenh Gas Control* 2013;18:23–37. <http://dx.doi.org/10.1016/j.ijggc.2013.05.032>.
- [24] Ghiat I, Al-Ansari T. A review of carbon capture and utilisation as a CO₂ abatement opportunity within the EWF nexus. *J CO₂ Util* 2021;45(December 2020):101432. <http://dx.doi.org/10.1016/j.jcou.2020.101432>.
- [25] Uibu M, Siirde A, Järvik O, et al. ClimMIT - Climate change mitigation with CCS and CCU technologies. *SSRN Electr J* 2021. <http://dx.doi.org/10.2139/ssrn.3812288>.
- [26] Bains P, Psarras P, Wilcox J. CO₂ capture from the industry sector. *Prog Energy Combust Sci* 2017;63:146–72. <http://dx.doi.org/10.1016/j.pecs.2017.07.001>.
- [27] Rodrigues R, Pietzcker R, Fragkos P, et al. Narrative-driven alternative roads to achieve mid-century CO₂ net neutrality in Europe. *Energy* 2022;239:121908. <http://dx.doi.org/10.1016/j.energy.2021.121908>.
- [28] ‘World’s smallest’ industrial carbon capture solution unveiled | News | gasworld. 2021, Accessed November 17, 2021. <https://www.gasworld.com/worlds-smallest-industrial-carbon-capture-solution-unveiled/2022075.article>.